


## Product Information

Product Brand: Roto NT, Roto NX

Roto NX / NT espagnolette extension with 200 mm cut-off range

Roto NX GV 330 1V | Roto NT GV 330

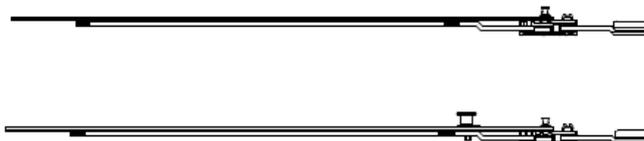

### Related Products

Roto NT, Roto NX

New product

### Scope

- Versatile application possibilities as espagnolette extension for special solutions
- 200 mm cut-off range according to the NX / NT standard
- for example for circumferential locking, triangular windows or the like
- for hardware resolutions with reduced locking point spacing

### Technical Details

- Component length 330 (340) mm with spigot / minimum insertion length: 130 mm
- component length 330 (340) mm without spigot / minimum insert length: 130 mm
- one coupling point fixed
- one coupling point can be cut to length
- Cutting range: 200 mm

#### Note

When cutting the espagnolette extension 330 1V to length, please note the following:

Due to the riveting of the cam, insertion problems may occur when cutting to length with the fitting punch in the application range 130 - 180 mm. (Spreading between face plate and push rod is more difficult).

We therefore recommend cutting the component straight and using the connecting bracket 350401.



Created on 24.02.2021

Modified on 24.02.2021

No. 20 2449

Alternatively, a fitting punch with offset cut (without spreading the fitting) can be used, for example Reiplinger Multi-Max BS 20 SPL.

Availability / Ordering ability in stock

#### Product Overview

Material No.	EAN no.	Description	PU	Price/Pcs.	Material Si ze	D-MG	Spout Mater ial
861349		NX GV 330 1V KB _SIL					
489993		NT GV 330 _SIL					
350401		VERBINDUNGSLASCHE NT					

### Confidential Information

Product Requirement: 2020/2449

Jurisdiction: **Steffen Dumke**, +49 711 7598 243, steffendumke@roto-frank.com (Customers and Markets, Product Adaptz



