

## Roto Safe - new latch adjustment parts



### Overview

#### System

Door

#### Product

Roto Safe

The modular multipoint locking system for doors

#### Availability / Ordering ability

### Description

The latch adjustment parts for Roto Safe frame parts have been completely redesigned to optimize functionality, appearance and ease of use.

### Significant changes compared to previous adjustment parts:

- **Adjustment technology:**  
Conversion from eccentric adjustment to precise tothing.
  - Adjustment travel: **+2.25 mm / -1.5 mm**
  - Adjustment in **0.75 mm increments** for precise adjustment.
- **Improved appearance:**  
Front edge in zero position flush with the most common axle dimensions for a harmonious appearance.
- **Optimized leading edge:**  
Changed geometry for improved contact pressure in the zero position.

### Availability:

The new latch adjusters are **available immediately in packs of 10:**


- For PVC/wood axis dimension 8.5-11.5 mm
- For PVC/wood axis dimension 12-15 mm
- For aluminum axis dimension 8.5-11.5 mm for leg heights <6 mm
- For Veka HET for leg height 4.5 mm and axis dimension 14 mm

### Conversion of other components:

One-piece strikers and contra espagnolettes are successively adapted (according to AS series, taking into account ranges and remaining stock). Separate information will be provided about each changeover.

## Article Overview

Article Code	EAN No.	Unit	Material Group
<b>2053416</b> FALLENVERSTELLTEIL 8,5 - 11,5 VE10	9005904409547	10	42
<b>2053418</b> FALLENVERSTELLTEIL 12 - 15 VE10	9005904409554	10	42
<b>2053726</b> FALLENVERSTELLTEIL F. ALU 8,5-11,5 VE10	9005904409585	10	42
<b>2053727</b> FALLENVERSTELLTEIL AS215 12-15 VE10	9005904409592	10	42

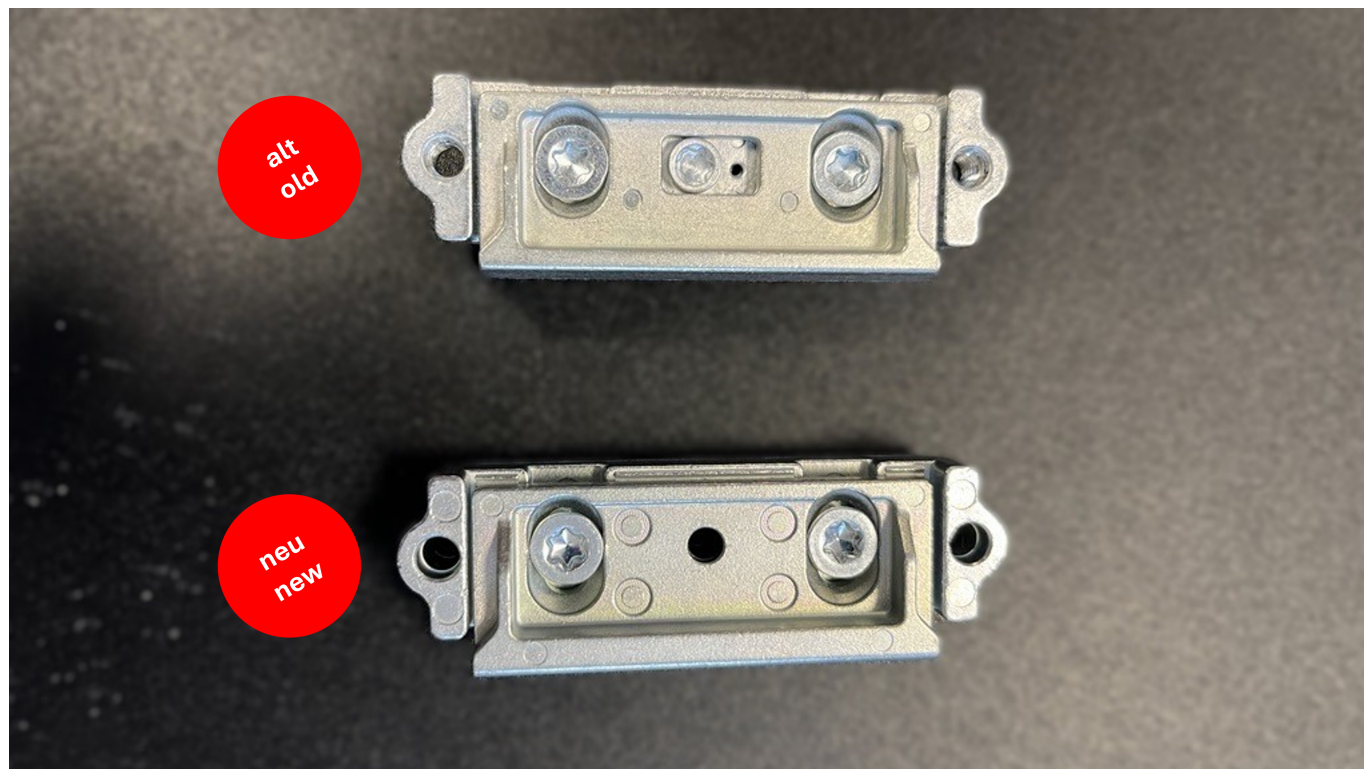

## Roto Frank Fenster- und Türtechnologie GmbH

Wilhelm-Frank-Platz 1  
70771 Leinfelden-Echterdingen  
Deutschland