


Product Information

Roto Patio Inline | SR: Assembly jig espagnolette position in the wing

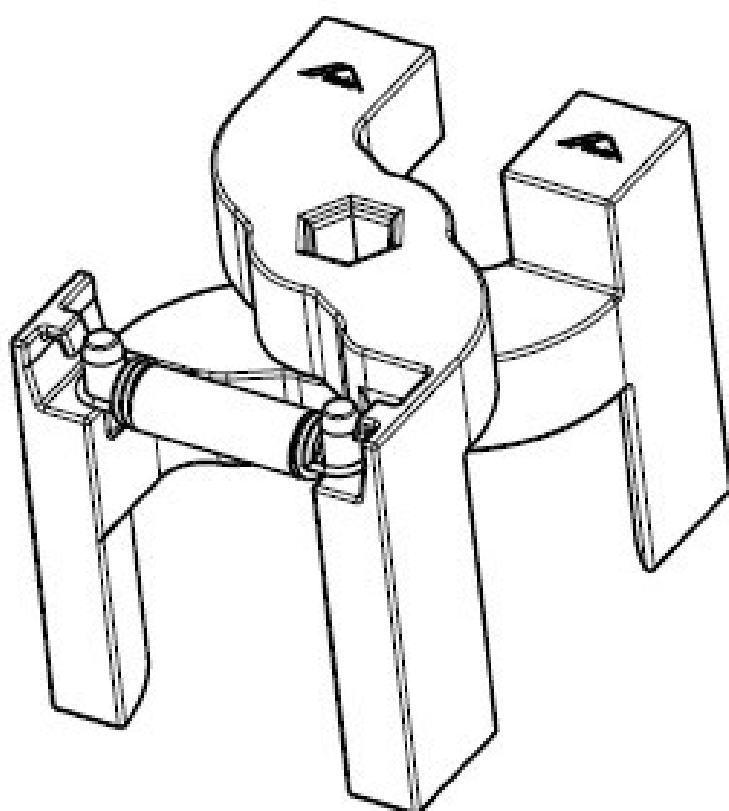

Overview

System

Sliding

Product

Roto Patio Inline

The reliable hardware system
for Parallel Sliding elements

Availability / Ordering ability

Orderable at CW 49/2025;
deliverable at CW 05/2026

Documentation

This information will be
included in the next version of
the installation instructions.
IMO_588: Roto Patio Inline |
SR installation instruction for
aluminum profiles

Description

Scope of application:

Roto Patio Inline | SR is suitable for aluminum profiles with a smooth rebate
or Euro groove (16.2 mm).

This affects all espagnolettes (not compact espagnolette).

Technical description:

With the jig, the standard and reverse espagnolettes can be mounted
easier in a sash with a smooth rebate. Implementation via PA 2025/2508.

Fittings overview and installation:

The jig must be preloaded (see Figure 1). It is then placed over the profile
and espagnolette (see Figures 2 and 3), with one jig at the top and one at
the bottom of the espagnolette (screw of jig in the slotted hole above the
hook). This holds the espagnolette in the correct position in the profile. In

the final step (see Figure 4), the espagnolette need to be screwed into place and then remove the jig.


Parts/Article:

All standard and reverse espagnolettes (not compact espagnolette). Two assembly jigs are always required per one espagnolette.

New article for jig: 2049784

Article Overview

Article Code	EAN No.	Unit	Material Group
2049784 PIL ML GP_R02.8 signalgrau	4036263583901		

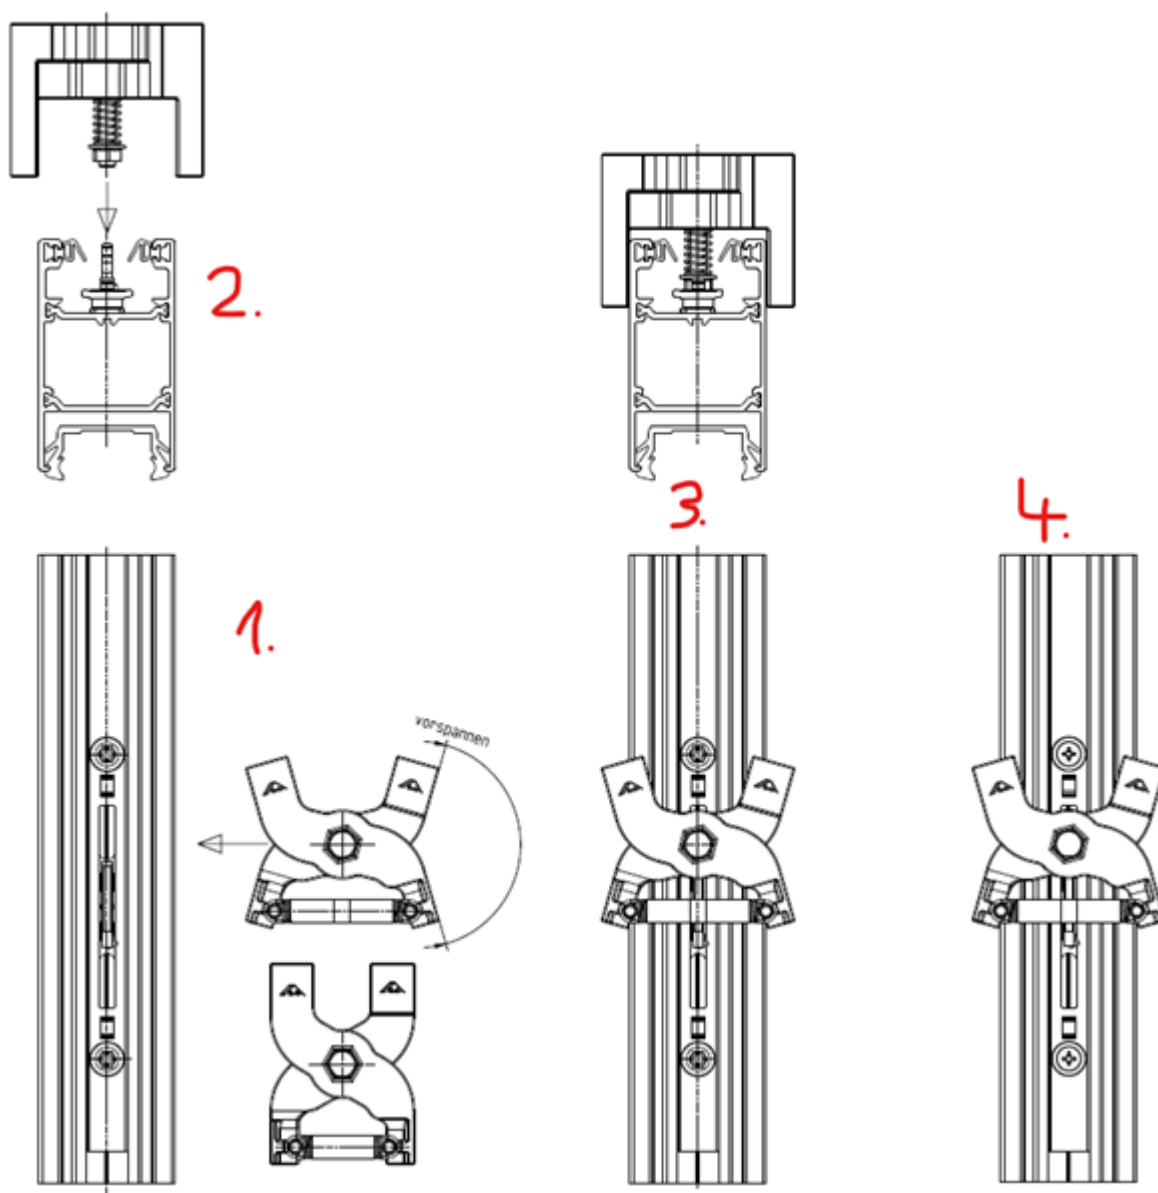

Roto Frank Fenster- und Türtechnologie GmbH

Wilhelm-Frank-Platz 1
70771 Leinfelden-Echterdingen
Deutschland